


AG-51 Audio Generator

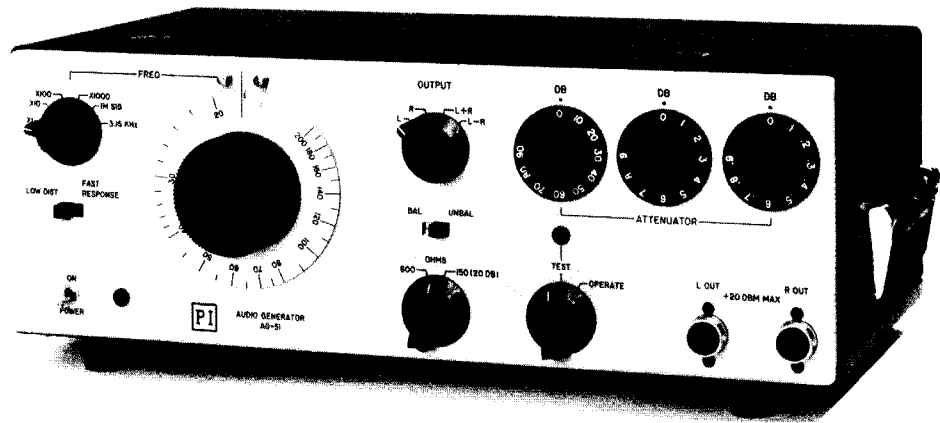

Key Features

- Transformerless Stereo Outputs (balanced or unbalanced)
- Output Level
 - +20 dBm across 600 ohms
 - 0 dBm across 150 ohms
- Stereo Matrix Switch
 - L, R, L-R, L+R
- Precision 10 dB, 1.0 dB, and 0.1 dB Step Attenuators
- High Level of RF Shielding

Description

The AG-51 Audio Generator contains a low distortion 20 Hz to 200 kHz sine wave generator, an SMPTE standard intermodulation signal generator and a fixed frequency sine wave generator at 3.15 kHz for wow and flutter tests. Signal outputs are simultaneously available at levels of up to +20 dBm (equivalent sine wave power for complex signals) at separate left (L OUT) and right (R OUT) output connectors. Outputs may be selected for left (L) only, right (R) only, left and right in phase (L+R), and left and right in phase opposition (L-R). Fully balanced or unbalanced outputs at impedance levels of 150 ohms or 600 ohms are front panel selectable. Three precision attenuators (10, 1.0 and 0.1 dB) provide a dynamic range of 99.9 dB in 0.1 dB steps. Attenuator dials display the output level directly in dBm in the 150 ohm source impedance configuration. Automatic output leveling circuitry with a built-in self-test feature

provides a constant output level thereby eliminating the need for output metering. In the TEST mode the generator output level is reduced to zero, a useful feature during noise measurements.

The time constant of the leveling control loop is determined by a front panel switch. For rapid frequency response measurements, this switch is set to the FAST RESPONSE position. This feature enables the operator to evaluate frequency response of the device under test (amplifier, filter, etc.) with a manual sweep of the frequency dial and multiplier switch. For distortion measurements, the switch is set to the LOW DIST position. This mode of operation provides minimum distortion with a slightly longer control loop time constant for accurate signal analysis at any specific frequency.

PI

Potomac Instruments

AG-51 Specifications

FREQUENCY RANGE	20 Hz to 200 kHz in four decade ranges	ATTEN. RANGE	0 to 99.9 dB in 0.1dB steps
OUTPUTS		ATTEN. ACCURACY	
L	Left only	0 to 10 db	±1.5% of attenuation in dB
R	Right only	>10 dB	±0.2 dB (maximum)
L + R	Left & Right in phase	INTRINSIC DISTORTION*	
L - R	Left and Right 180° out of phase	Harmonic	Low Distortion Fast Response
IM SIG	Composite 60 Hz and 7 kHz @ 4:1 ratio (SMPTE Standard)	20 Hz to 10 kHz	< 0.05% < 1%
3.15 KHz	Fixed wow and flutter signal, (IEEE Standard 193-1971)	10 kHz to 20 kHz	< 0.08% < 1%
OUTPUT IMPEDANCE		Intermodulation	<0.03%
Unbalanced	150 or 600 ohms, switch selected	Incidental FM(3.15 kHz)	<0.01%
Fully Balanced	150 or 600 ohms, switch selected	HUM and NOISE	>80 dB below rated output
OUTPUT LEVEL(no atten.)		DIAL ACCURACY	±3%
Sine Wave Signals	+20 dBm (7.75 V) across 600 ohm load, 15.5 V open circuit	POWER	117 Vac, (230 Vac option)
	0 dBm (0.387 V) across 150 ohm load, 0.774 V open circuit	50/60 Hz, 9 W	
IM Signal	Peak-to-peak voltage of composite waveform is equal to peak-to-peak voltage of +20 dBm sine wave across 600 ohm load, 0 dB sine wave across 150 ohm load	WEIGHT	
		with cover, lb. (kg)	12 (5.44)
OUTPUT LEVEL ACCURACY		DIMENSIONS in. (cm)	15.25 (38.74) W, 5.25 (13.34) H, 10.13 (25.75) D
	± 0.2 dB (20 Hz - 100 kHz)	Optional Rack Mount	5.25 (13.34) Rack space reqd.
	± 0.5 dB (100 kHz - 200 kHz)		

* Slightly higher at R output in L-R, UNBAL mode.

Specifications subject to change without notice.

PI

Potomac Instruments, inc.

932 Philadelphia Avenue, Silver Spring, Maryland 20910 • (301) 589-2662 • FAX (301) 589-2665